LFC-70

Bio-Digester



Reduce Carbon Footprint

Safely digests 70–125 kg (150–280 lbs) of waste food per day

Add waste food anytime

Quickly digests waste food with no odor or noise

Payback 6-24 months

Three years warranty



The LFC-70 is a fully enclosed automatic biodigester that safely disposes of 70–125 kg (150–280 lbs) of waste food each 24 hours with no noise or odor. Once installed, you can add waste at any time without needing to empty byproducts. The LFC discharges only decomposed food as grey water that is environmentally safe.

With our proprietary mixture of microbes and enzymes, the LFC uses a series of processes in which microorganisms break down biodegradable material in the presence of oxygen. The LFC maintains equilibrium for the microorganisms by injecting water periodically; this rapidly


decomposes the waste food and flushes decomposed material out of the LFC.


Every 20 minutes, the LFC rotates an arm inside to slowly mix new waste food, old waste food, oxygen, water, and microorganisms to enhance the decomposition.

The LFC is a practical alternative to the traditional disposal of waste food. Anything you can eat, including fruits, vegetables, meat, fish, cheese, bread, rice, and noodles can go into the LFC.

LFC-70

Technical Specifications

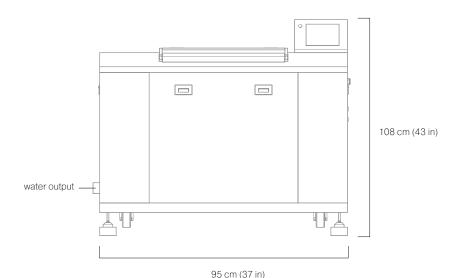



72 cm (28 in)

Capacity per Day

70-125 kg (150-280 lbs)

Construction

All stainless steel (chassis, side panels, drum, shaft, arms, paddle, and load cells)

Dimensions

95 x 72 x 108 cm (37 x 28 x 43 in)

Weight when Empty

220 kg (490 lbs)

Water Inlet

1/2" female (DN15), 250 to 700 kPa (36 to 100 psi, 2.5 to 7 kg/cm²)

Water per Day

190 litres (50 gallons) typical

AC Supply

120 V, 60 Hz or 230 V, 50 Hz 15 A, single phase

Maximum Power

650 W

Energy per Day

3.9 kWh typical

Weighing Accuracy

±1%

User Interface

22 mm 3-color LED 4" touchscreen with 65k colors

Ethernet

RJ45, 100 baseT, DHCP or fixed IP address

Operating Environment

Indoors or covered patio

Operating Temperature

4°C to 35°C (39°F to 95°F)

Ingress Protection

IP54 – splash proof and dust proof

Powerzyme

0.7 litre, included with initial purchase

Powerchips

70 litre, included with initial purchase

Operating Lifetime

Expected to be 15 to 25 years

Warranty

3 years on all parts and components

Safety

Certified to UL430 (waste disposal machines) CAN/CSA-C22.2 No. 60335-1:11 EN 60335-1:2010+AMD1:2013 (general safety) CAN/CSA-C22.2 No. 60335-2-16:16 EN 60335-2-16:2002+A1:2008+A2:2011 (waste food disposers)

EMC

EN 61000-6-3:2007+A1:2011 EN 61000-6-1:2007 EN 61000-3-2:2006+A1:2008+A2:2009 EN 61000-3-3:2013

RoHS

Compliant for EU and China





Power Knot LLC | 2290 Ringwood Avenue | San Jose, CA 95131 USA | +1-408-889-8433 | info@powerknot.com | www.powerknot.com